

# 4 Gang 2 Way Switch

## Specifications

### Electrical:

- Rated Voltage: 250VAC 50/60Hz
- Rated Current: 16AX
- Recommended wire size: 1.5mm<sup>2</sup>- 4mm<sup>2</sup>

### Mechanical:

- Contact material: Silver-Nickel alloy
- Isolating gap contact: 3mm nominal
- Minimum no. of operations: 40,000 @16A
- Overall dimension: 88mm x 86mm x 32mm (HxWxD)
- BS 4662 wall box compatible



Front view

### Environmental:

- Operating Temperature: -5°C to +40°C
- IP Rating: IP2X

### Standards:


- IEC60669-1
- BS EN60669-1
- GB16915-1



Back view

## Wiring diagram

Two-way switching:

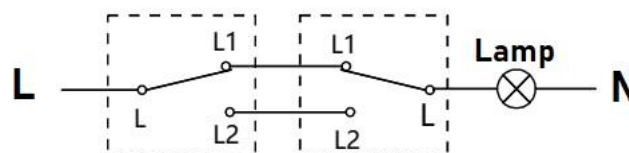

## Ordering information

Colour	Part No.
White	RCE-NA42
Silver	RCE-NA42-4SV
Champagne	RCE-NA42-4CP
Black	RCE-NA42-4BL

The information given in this document may be amended. You are also reminded that all products must be installed by a qualified professional.