

# 1 Gang 20A DP Switch with Indicator Light

Aster

## Specifications

### Electrical:

- Rated Voltage: 250VAC 50/60Hz
- Rated Current: 20AX
- Recommended wire size: 4mm<sup>2</sup>- 10mm<sup>2</sup>

### Mechanical:

- Contact material: Silver-Nickel alloy
- Isolating gap contact: 3mm nominal
- Minimum no. of operations: 40,000 @20A
- Overall dimension: 88mm x 86mm x 32mm (HxWxD)
- BS 4662 wall box compatible

### Environmental:

- Operating Temperature: -5°C to +40°C
- IP Rating: IP2X

### Standards:

- IEC 60669
- BS EN 60669




Front view



Back view

## Wiring diagram

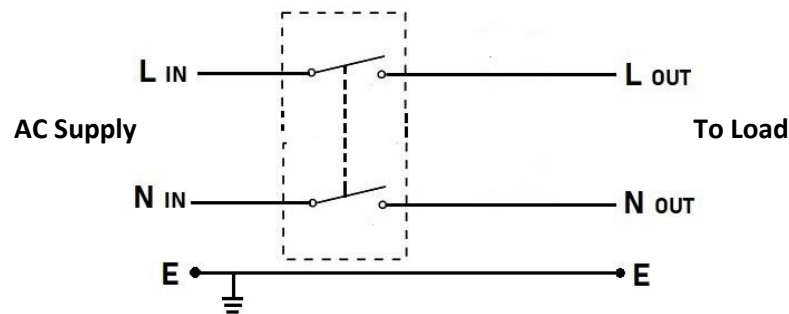

Note: Use ferrules/end sleeves for termination for wire size smaller than the recommended.

## Ordering information

| Colour    | Part No.         |
|-----------|------------------|
| White     | RCE-NA1L-X20     |
| Silver    | RCE-NA1L-X20-4SV |
| Champagne | RCE-NA1L-X20-4CP |
| Black     | RCE-NA1L-X20-4BL |

The information given in this document may be amended. You are also reminded that all products must be installed by a qualified professional.