

CAT 6 UNSHIELDED 180° TOOLLESS KEYSTONE JACK

Description

RFI Cat 6 Unshielded 180° Toolless Keystone Jack is designed for high speed transmission. Tool less, quick and easy termination which makes an ideal for terminating and connecting network cable. RJ45 connectors are equipped with a rotation locking, punching sequence direction marks on the sides of keystone jack helps provide a correct quick guide during application.

Application

Gigabit Ethernet application.

Features



- 180° short and slim profile
- Toolless connection
- Accept 22-26 AWG solid wire
- Support both T568A and T568B wiring
- Support Gigabit Ethernet application

Characteristics

- Current Rating: 1.5amp (max.)
- Voltage Rating: 150 V
- Contact Resistance: 20 m-Ω
- Insulation Resistance: 500 m-Ω
- Dielectric Withstand Voltage: 1000 V AC
- RMS, 60Hz 1min
- Housing: New PC
- PCB: FR4 1.6mm(0.4") thickness, 2 layers
- Contact: Phosphor bronze
- Gold pins: Phosphor bronze, Gold plating
- Terminal pins: Phosphor bronze , ZIN plating

Standard

- EN 50173
- ANSI/TIA-568
- ISO/IEC 11801
- UL 1863
- RoHS compliance
- Reach compliance

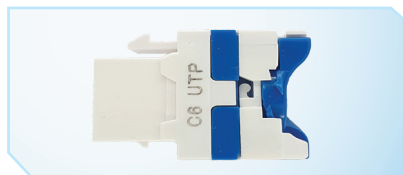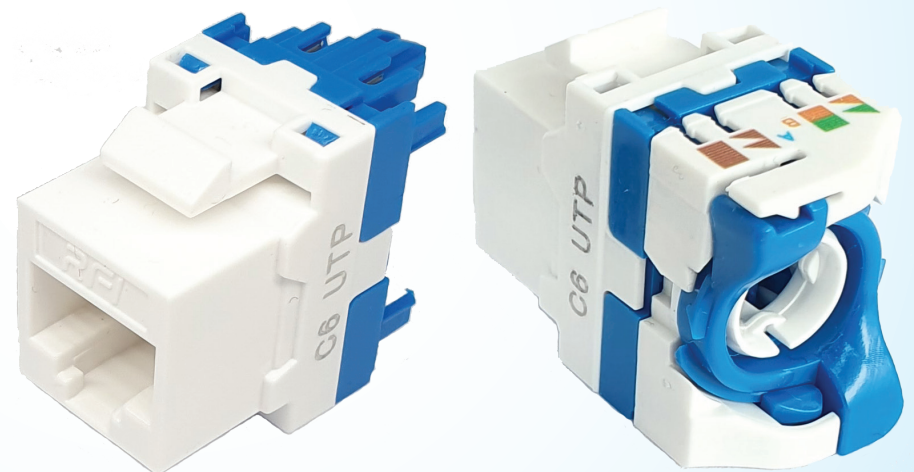

Ordering information

| Part No. | Description |
|-----------------|---|
| RJD-60U8880-05B | Cat 6 Unshielded 180° Toolless Keystone Jack, White |